
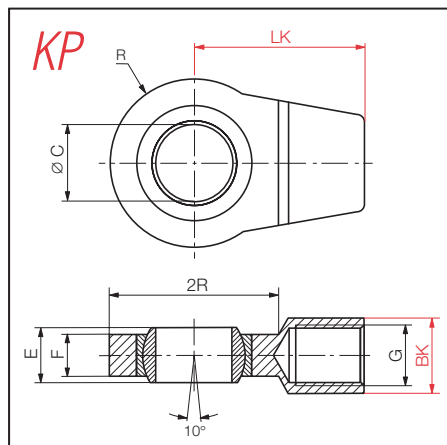
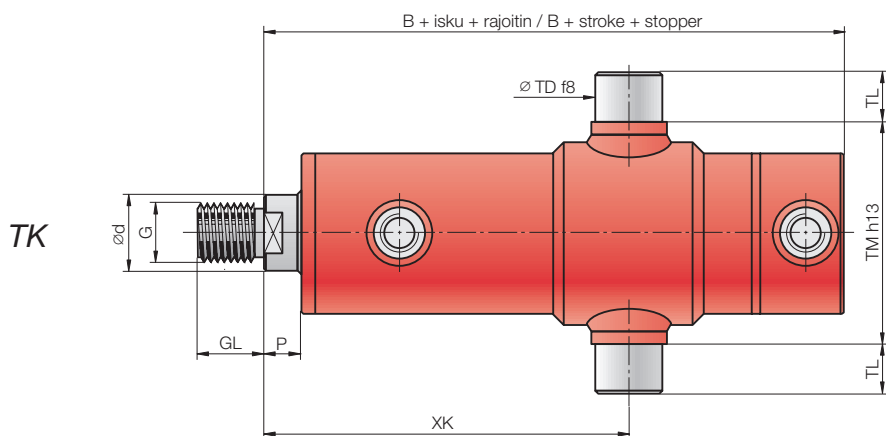


Nimellispaine
Nominal pressure
21 MPa (210 bar)

HD 2200 Ø25–Ø125 TP ja TK

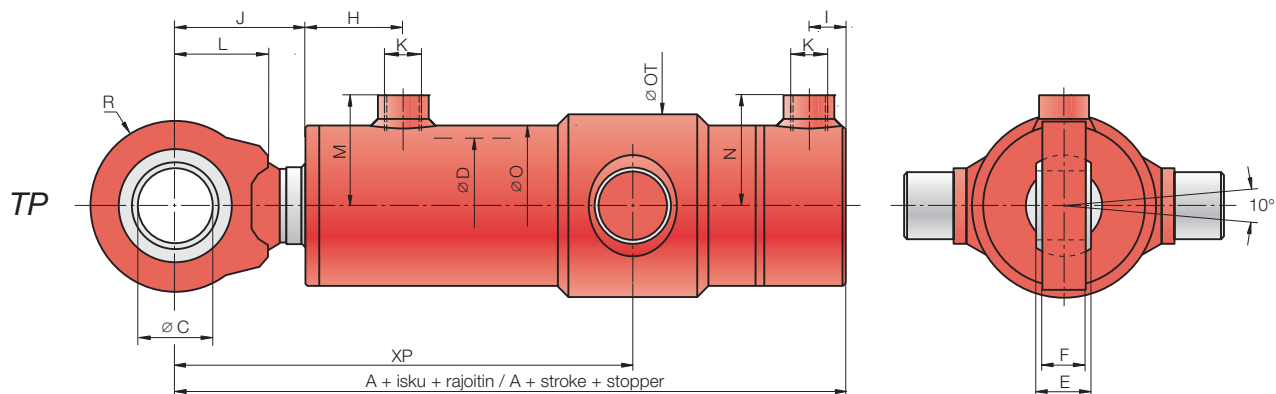

Technical drawing of a hydraulic cylinder head showing dimensions D, d, A, B, C, E, F, G, GL, H, I, J, K, L, M, N, O, OT, P, R, TD, TL, TM, XPmin, XKmin, BK, and LK.

D	25	32	40	50	63	80	100	125		
d	14	18	22	28	36	45	56	70		
A	135	145	165	175	195	230	265	300		
B	110	115	130	135	145	175	195	215		
C	15 ⁰ _{-0,008}	20 ⁰ _{-0,010}	25 ⁰ _{-0,010}	30 ⁰ _{-0,010}	35 ⁰ _{-0,012}	45 ⁰ _{-0,012}	60 ⁰ _{-0,015}	70 ⁰ _{-0,015}		
E	12	16	20	22	25	32	44	49		
F	9	12	16	18	20	25	36	40		
G	M10x1,5	M14x2	M16x2	M20x2	M24x2	M36x2	M42x3	M56x3		
GL	18	20	24	28	32	40	45	56		
H	43	44	44	45	51	58	66	75		
I	10	10	12	13	17	17	21	22		
J	34	40	50	54	62	77	96	113		
K	R1/4"	R1/4"	R3/8"	R3/8"	R1/2"	R1/2"	R3/4"	R3/4"		
L	25	30	35	40	50	55	70	85		
M	31	32	40	45	56	66	78	93		
N	31	32	40	45	56	45	54	70		
O	37	40	50	60	75	95	115	145		
OT	48	55	62	74	90	110	130	168		
P	9	10	15	14	12	22	26	28		
R	20	25	30	35	40	50	65	75		
TD	16	20	25	30	35	40	50	60		
TL	14	16	17	18	20	30	40	50		
TM	58	66	75	85	105	130	155	190		
XPmin	120	130	145	150	175	205	245	280		
XKmin	95	100	110	110	125	150	165	185		
BK	16	20	25	28	30	45	55	70		
LK	40	50	60	70	80	100	120	140		
Painot	0-iskulla/0-stroke	(kg)	1,1	1,3	2,3	3,3	5,7	9,2	19	32
Weights	per 100 mm iskua/stroke	(kg)	0,6	0,6	0,9	1,2	1,8	2,9	3,9	6,3