
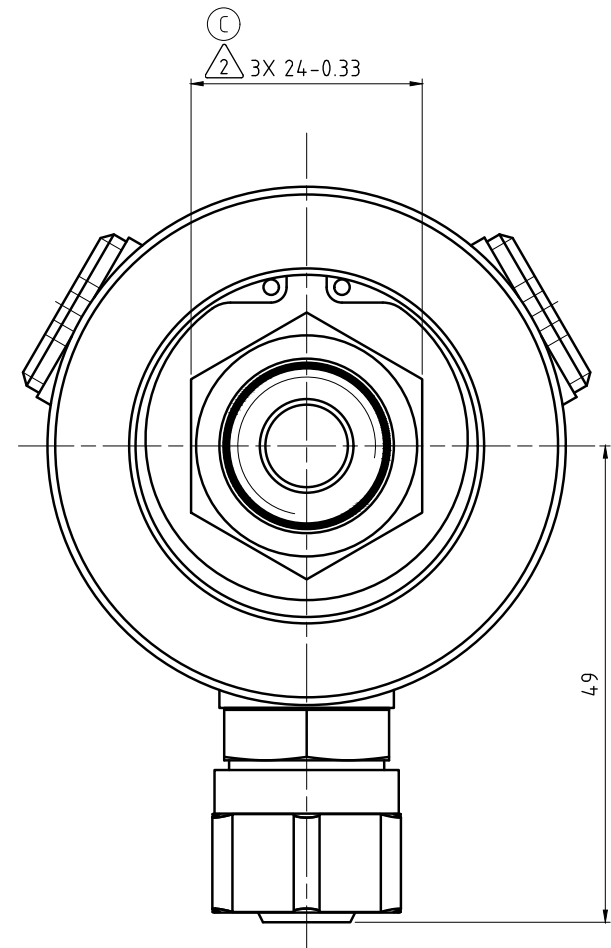
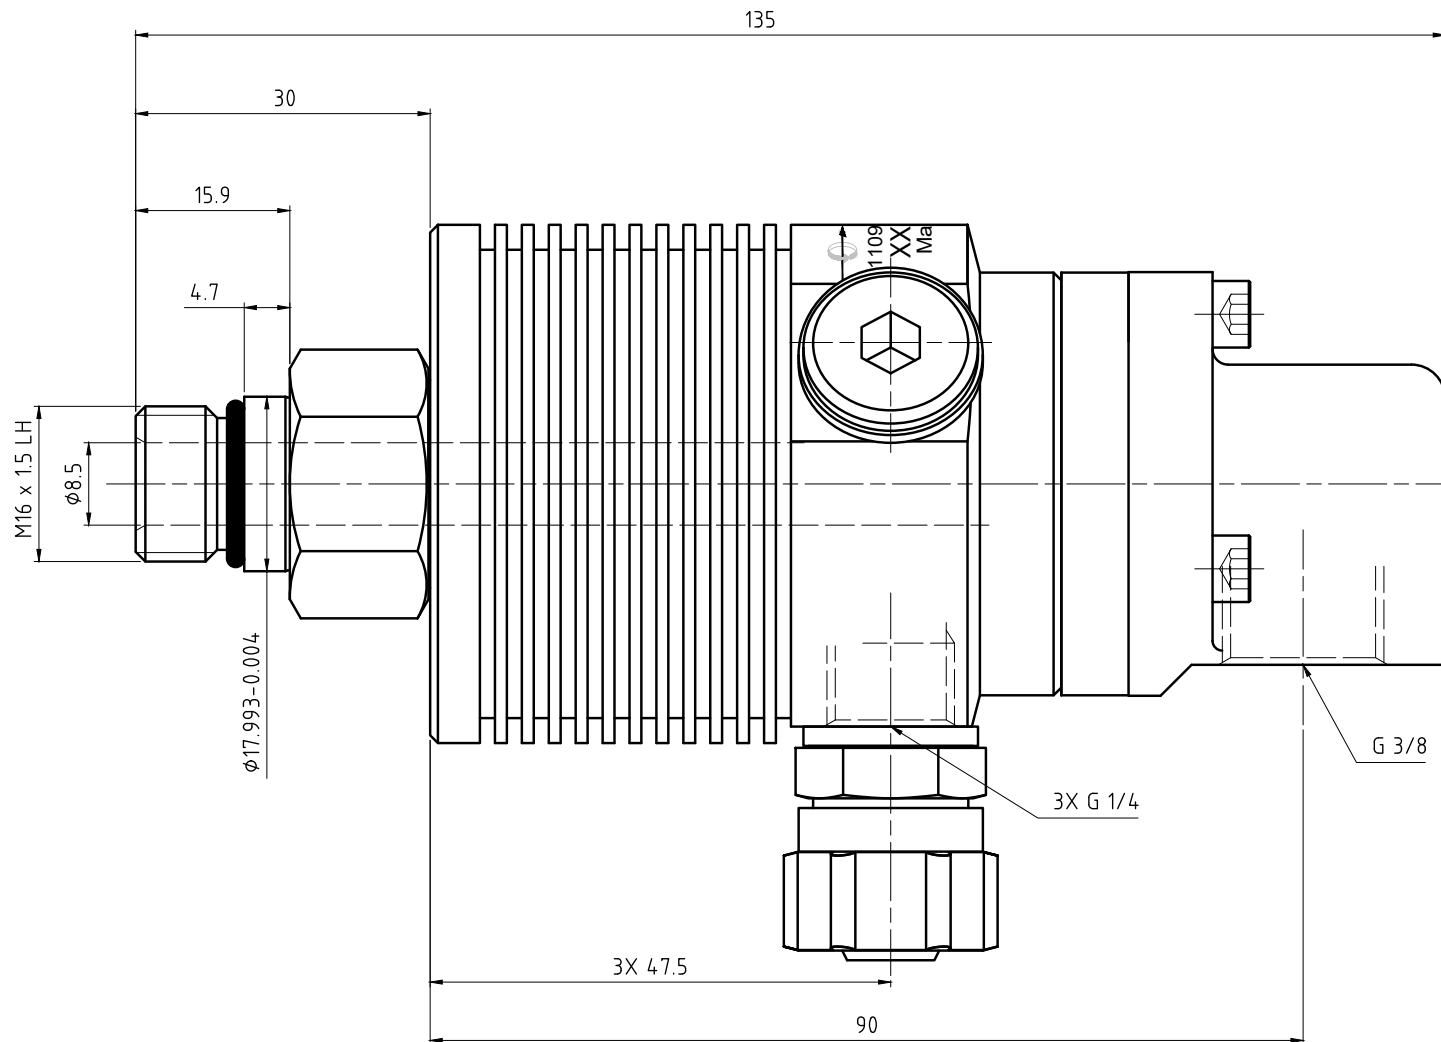



IL PRESENTE DISEGNO CONFIDENTIAL USIVA PROPRIETA' SEIUS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION. IT IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY MANNER, AND ALL RIGHTS ARE RESERVED TO THE COMPANY. ANY VIOLATION OF THIS AGREEMENT WILL BE SUBJECT TO LITIGATION IN THE COURTS OF THE STATE OF CALIFORNIA. CONFIDENTIALITY OF INFORMATION CONTAINED IN THIS AGREEMENT WITH DISCLOSURE OF COMPANY AND ALL RIGHTS RESERVED.

[illegible]

2 - TORQUE BOND 15 Nm.

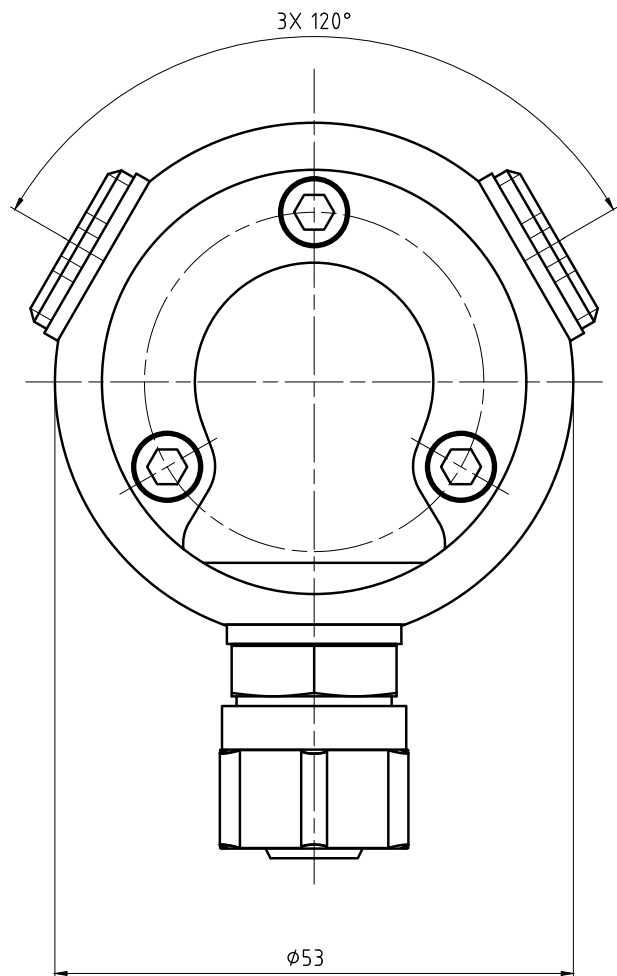

SCHULERSCHAFTSVEREIN

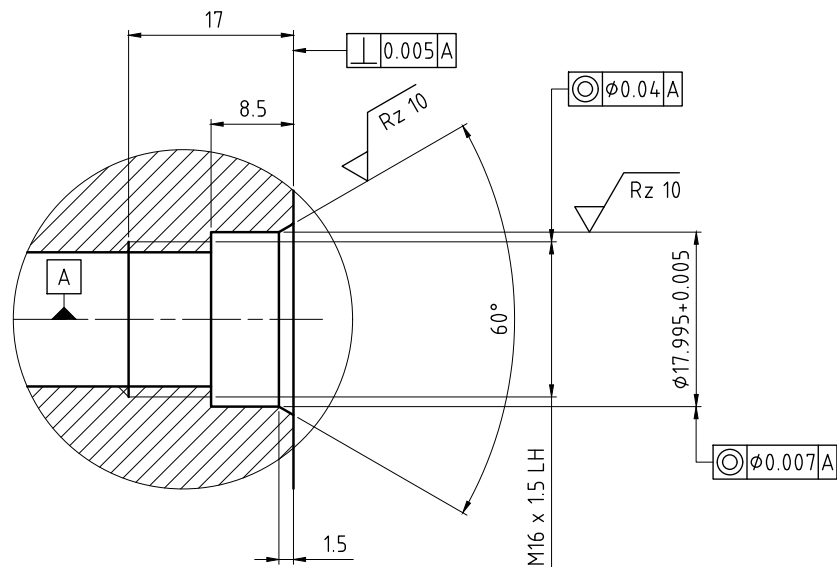

OPERATING DATA			
MEDIA		LUBRICANT	MINIMUM
PRESSURE	MAXIMUM	105 bar	10 bar
	NOMINAL	1 bar	1 bar
FLOW RATE	MAXIMUM	82 L/min	3810 NL/min
	NOMINAL	6 L/min	360 NL/min
TEMPERATURE	MAXIMUM	70 °C	70 °C
	NOMINAL	5 °C	5 °C
MAXIMUM PRESSURE		20000 min ⁻¹	20000 min ⁻¹
OPERATING A SECCO		SUPERSECCO	
REFRIGERANT		ISO 4406 CLASS 17/15/12	

 DEUBLIN® <i>Engineered for Performance</i>					PROJECTION: 		SCALE: 2:1					
							MATERIAL: INTERSECTION ROAD DRAWING					
					DATE		NAME		TITLE: DEUBLIN UNION			
					DRN. 05.11.2007		F. Dahl					
					ENGR. 05.11.2007		Ch. Wolf					
C	ADD NOTES & TORQUE		054458	12/19	MKI	APPD.						
B	ADD ITALIAN LAYER		031349	01/15	RA					NO. 1109-020-188		
D	UPDATE DWG		025297	01/14	RA							
ISSUE MODIFICATION					ECO	DATE	SIGN			SHEET A2		
					A. NENZI UNITS: DIMENSIONS IN MILLIMETERS DIMENSIONS IN INCHES ARE FOR REFERENCE							