



## NU 214 ECM

### Single row cylindrical roller bearing, NU design

Single row cylindrical roller bearings are designed to accommodate high radial loads in combination with high speeds. Having two integral flanges on the outer ring and no flanges on the inner ring, NU design bearings can accommodate axial displacement in both directions. An important feature is the separable design, which facilitates mounting and enables the bearing components to be interchanged.

- High radial load carrying capacity
- Low friction
- Long service life
- Accommodate axial displacement in both directions
- Separable design

## Overview

### Dimensions

Bore diameter	70 mm
Outside diameter	125 mm
Width	24 mm

### Performance

Basic dynamic load rating	137 kN
Basic static load rating	137 kN
Reference speed	6 000 r/min
Limiting speed	6 300 r/min
SKF performance class	SKF Explorer


### Properties

Bearing part	Complete bearing
Axial displacement capability	In both directions
Number of rows	1
Locating feature, bearing outer ring	Without
Bore type	Cylindrical
Cage	Machined brass
Number of flanges, outer ring	2
Number of flanges, inner ring	0
Loose flange	None
Radial internal clearance	CN
Tolerance class	Normal
Coating	Without
Sealing	Without
Lubricant	None
Relubrication feature	Without
Indicative carbon footprint for new product	4.8 kg CO <sub>2</sub> e

### Logistics


Product net weight	1.32 kg
eClass code	23-05-09-01
UNSPSC code	31171505

## Technical specification

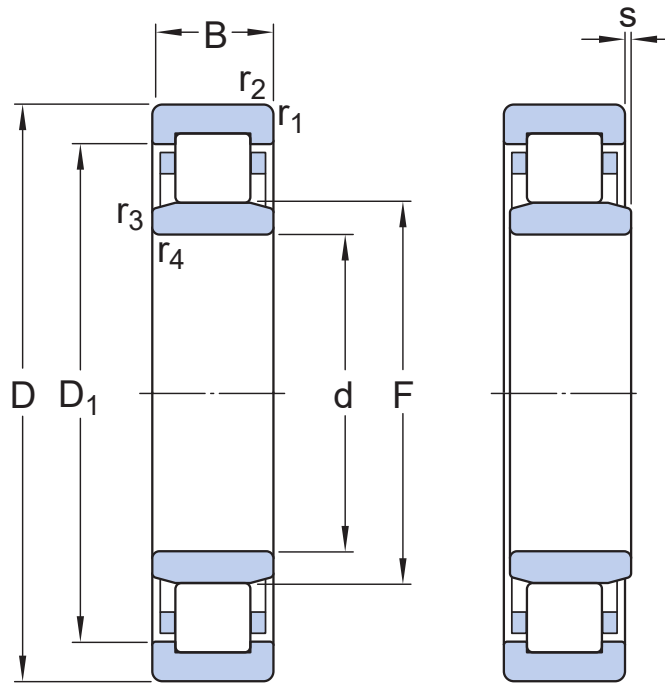

## Dimensions

d	70 mm	Bore diameter
D	125 mm	Outside diameter
B	24 mm	Width
D <sub>1</sub>	≈ 108.3 mm	Shoulder diameter of outer ring
F	83.5 mm	Raceway diameter of inner ring
r <sub>1,2</sub>	min. 1.5 mm	Chamfer dimension
r <sub>3,4</sub>	min. 1.5 mm	Chamfer dimension
s	max. 1.2 mm	Permissible axial displacement

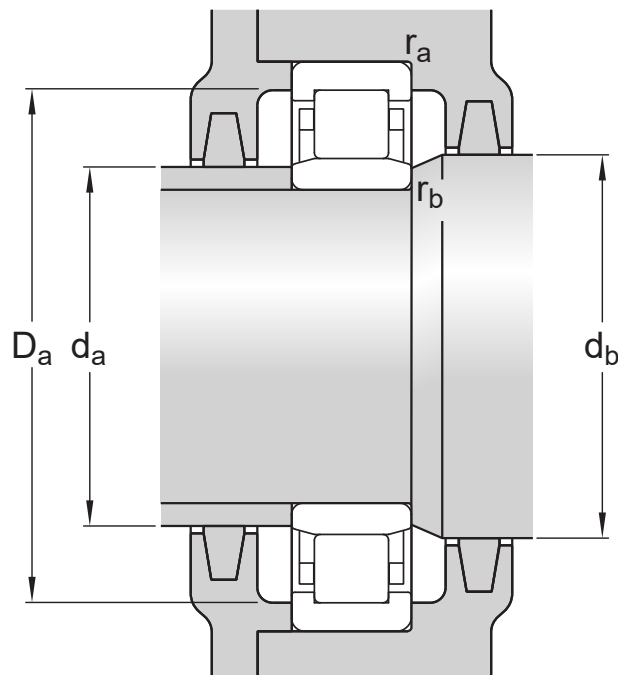

## Abutment dimensions

$d_a$	min. 79 mm	Diameter of spacer sleeve
$d_a$	max. 81 mm	Diameter of spacer sleeve
$d_b$	min. 86 mm	Diameter of shaft abutment
$D_a$	max. 115.4 mm	Diameter of housing abutment
$r_a$	max. 1.5 mm	Radius of fillet
$r_b$	max. 1.5 mm	Radius of fillet

## Calculation data

SKF performance class		SKF Explorer
Basic dynamic load rating	C	137 kN
Basic static load rating	$C_0$	137 kN
Fatigue load limit	$P_u$	18 kN
Reference speed		6 000 r/min
Limiting speed		6 300 r/min
Minimum load factor	$k_f$	0.15
Limiting value	e	0.2
Calculation factor	Y	0.6

## Associated products

Angle ring	HJ 214 EC
------------	-----------

## Tolerances and clearances

### GENERAL BEARING SPECIFICATIONS

- Tolerances: Normal (metric), P6, Normal (inch)
- Radial internal clearance: cylindrical bore, tapered bore
- Axial internal clearance: NUP, NJ + HJ

## BEARING INTERFACES

- [Seat tolerances for standard conditions](#)
- [Tolerances and resultant fit](#)

## Compatible products

### Recommended product

---

Angle ring (L-shaped thrust collar) for single row cylindrical roller bearings, NU or NJ design

[HJ 214 EC](#)

### Recommended tool

---

Aluminium dismounting ring

[TMBR NU214EC](#)