


ROTARY UNION 1K-GD-SL-SK


DIMENSIONS

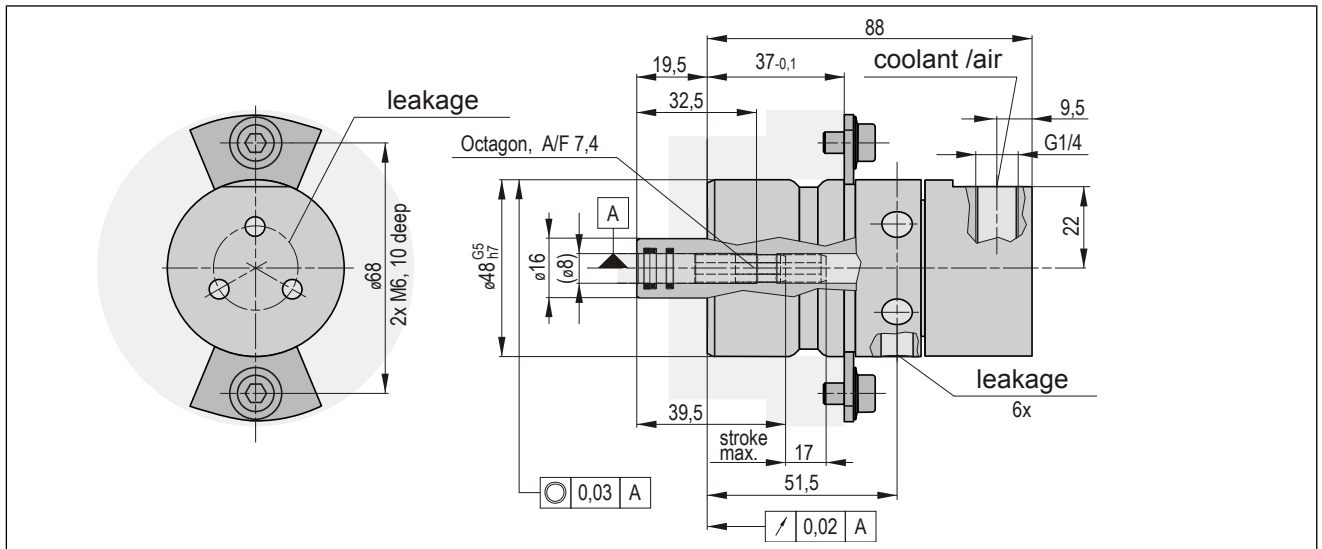

TECHNICAL DATA

spindle speed max.	36000	min ⁻¹
coolant pressure max.	80	bar
minimum volume lubrication max.	10	bar
cleaning air max.; n = 0 min ⁻¹	10	bar
pressure air max.; n < 10000 min ⁻¹ (per discussion)	5	bar
required media purity according ISO 4406	-/17/14	
filter grade	< 50	µm

FLOW VOLUME

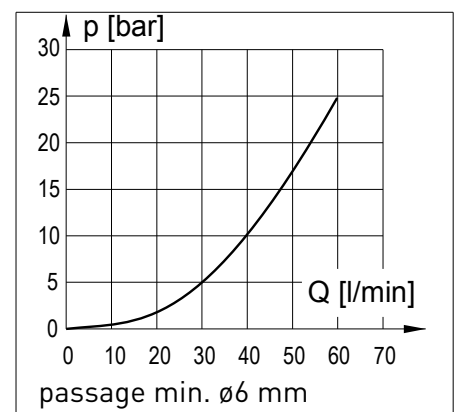

FEATURES

- For spindles with seal air only
- optimized for 5-axis head applications
- hybrid bearing
- balanced design
- closed sealing surface
- coolant
- dry operation
- minimum volume lubrication (mixed externally)

code		
3	1	-
order number		
95.250.026.1.0		

Subject to modification due to technical advance!

9525002610V00 DE 2017-11 // ENGLISH

OTT-JAKOB Spanntechnik GmbH // Industriestraße 3-7 // D-87663 Lengenwang
☎ +49 83 64 / 98 21 -0 // 📠 +49 83 64 / 98 21 -10 // ✉ info@ott-jakob.de // www.ott-jakob.de